

M275W Servo Wicketer



Key Features

- Tool-less rope belt table adjustment
- Tool-less wicket arm hub adjustment
- Easy wicket pin adjustment
- Maximizes process efficiency with real time seal dwell
- Recipe storage for up to 500 bag set-ups
- Smokehood enclosure standard for cleaner working environment
- Cycle speeds over 325 cpm
- Seals a wide variety of blends and gauges
- All metric fasteners
- Designed for the needs of the global market

Available Options


- WASP
- Sealbar cleaning system – requires SST sealbar
- Servo Anti-bounce over infeed
- Servo Presealer
- Bank punches
- Square and round bottom
- Zipper sealer
- Drum and hot air sealing
- Ball and dye punching
- Cross sealers

M275W Servo Wicketer


The M275W Servo Wicketer is a newly redesigned wicketer that has the same quality, efficiency, and reliability of its predecessor, but with new features and time saving adjustments to keep your machine running longer with less down time. With easy wicket pin adjustments, tool-less rope belt adjustments, tool-less vacuum hub adjustments, simplified infeed threading, and producing cycle speeds over 325 cpm, Hudson-Sharp has made the best, better!




Right Hand Orientation

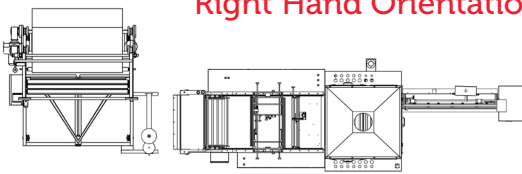


Extended Conveyor

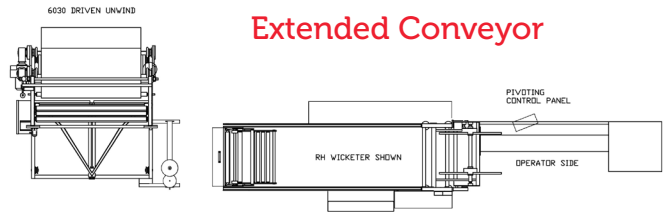

Left Hand Orientation

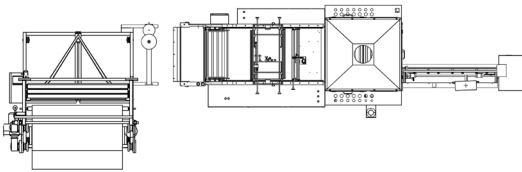

With WASP

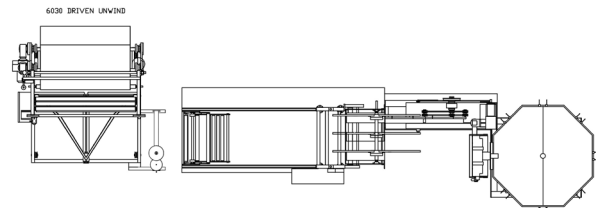

Product Specifications

M275W Wicketer	
Maximum Draw Length	390 mm (15.5 in)
Stacking Positions	4+1
Bag Depth (Includes Lip)	152 mm (6 in) to 711 mm (28 in)
Nominal Machine Width	750 mm
Power Supply*	480 V; 60 Hz; 3 ph+N
Air Requirements	800 NL/min at 7 bar (25 cfm at 80 psi)
Water Requirements	4 L/min (1.1 gal/min)
Maximum Cycle Speed	over 325 cpm
Maximum Linear Speed	92 m/min (300 ft/min)

*standard voltage shown, other voltage available